

# Spartan Doors - Fire Door



Spartan Doors manufactures specialised doors and frames for commercial and industrial applications.



## Fire Door

An access door with fire resistant vermiculite core, finished with timber sheets and internal edge strips.

## Description

The Spartan Fire Door is a multi-purpose door ideal for internal and external use in industrial, commercial and residential applications where fire protection is required.

It uses timber rails to form a frame around a fire resistant vermiculite core. It is manufactured in accordance with AS1530 part 4, and is certified to AS1905 part 1 of the building code standards.

Varying finishes provide a professional look while maintaining functionality, durability and security. A large range of hardware options are available and can be fitted upon request. Framing selections depend on single or double width and swing choice.

## Application

Warehouses, basement offices, schools, maintenance facilities, hospitals, residential units, shopping centres.

## Finishes

The standard finish is ply sheet. Other finishes available include MDF, duracote and veneer. Metal sheets with thicknesses up to 1.5mm can be used to increase durability and security.

Product Data Sheet

All statements, technical information, and recommendations related to Spartan's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application.



110 Mitchell Ave, Kurri Kurri, NSW, 2327, AUSTRALIA  
PHONE: 1300 784 852 | FAX: 1300 784 952  
EMAIL: [info@spartandoors.com.au](mailto:info@spartandoors.com.au)  
WEB: [www.spartandoors.com.au.com.au](http://www.spartandoors.com.au.com.au)

© 2018

# Spartan Doors - Fire Door

## Specification

Based on standard door configuration.  
Other size, finish, frame and hardware options are available.


Size: Standard - 2040mm high x 820mm wide x 36mm thick (internal 1-hour)  
2040mm high x 920mm wide x 45mm thick (external 2-hour)  
Double - 2040mm high x 920/920mm wide x 45mm thick (external 2-hour)

Design: Incorporates 10mm wide internal edge strips to form a frame around the core in compliance with AS1530 part 4 and AS1905 part 1.

Finish: Ply Sheet.

Core: Vermiculite sheet.

Weight: 45mm leaf - 40KG  
36mm leaf - 32KG

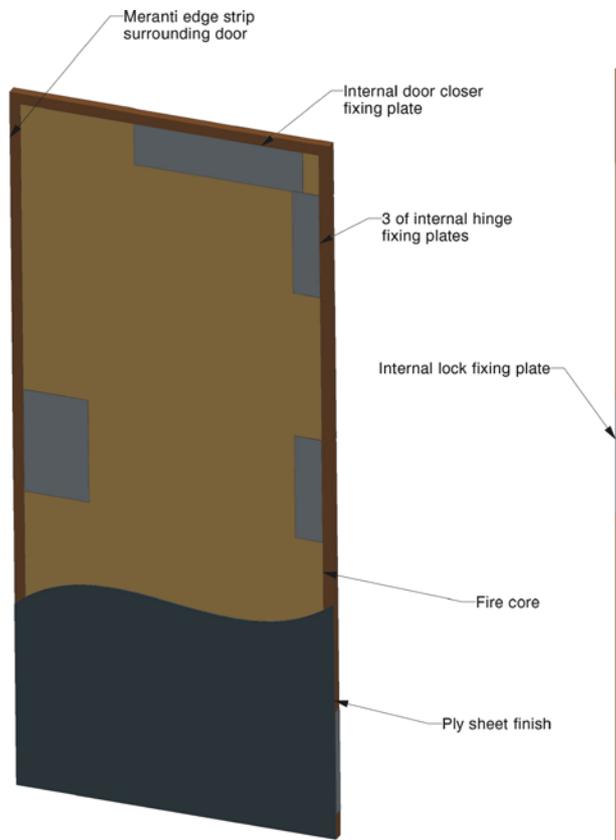

## To Specify

Door shall be Spartan Fire Door to AS1530 part 4 standard and certified to AS1905 part 1. 45mm or 36mm thick standard door leaf of vermiculite covered with ply sheet. Timber internal edge strip to surround core material. Other hardware and seals can be fitted by Spartan Doors as required.

## To Order

Refer to the Fire Door order sheet for a full list of options and ordering information.

For further information please contact Spartan Doors or your nearest Spartan Doors dealer.