


# Spartan Doors : Timber Finishes Guide

## MDF



**Thickness:** 3mm, 4mm, 4.75mm, 6mm

## Primed MDF

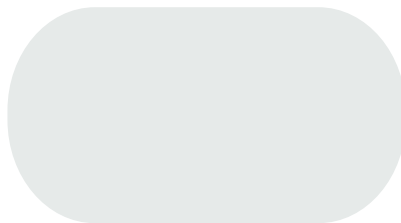

- Suitable for semi-gloss or high-gloss paint
- Thickness:** 4mm, 4.75mm, 6mm

## HMRXP



- Suitable for external use
  - Suitable for semi-gloss or high-gloss paint
- Thickness:** 3.2mm, 6mm

## Paint Grade Plywood



- Suitable for external use
- Thickness:** 3.6mm

## Marine Grade Plywood




- Suitable for external use
- Thickness:** 6mm

## Fire Treated Plywood



- Suitable for external use
- Thickness:** 4mm

## Sliced Pacific Maple Veneer

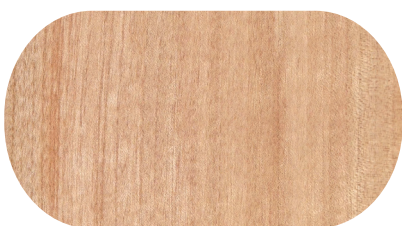

- Suitable for staining
- Thickness:** 3.2mm

## Victorian Ash / Tasmanian Oak Veneer



- Suitable for staining
- Thickness:** 4mm

## Duracote



- Suitable for external use
  - Suitable for semi-gloss or high-gloss paint
- Thickness:** 3.2mm

Please contact us directly to discuss our full range of veneers.



110 Mitchell Avenue, Kurri Kurri, NSW, 2327, Australia

**PHONE:** 1300 784 852 | **FAX:** 1300 784 952 | **EMAIL:** doors@spartandoors.com.au

**WEB:** spartandoors.com.au

All statements, technical information, and recommendations related to Spartan's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application.

© 2022